



OGS60

SoBuy®



UNIT:MM

1

2

3

4

×
2

5

6

7

×
2

8

×
8



1.



Unfasten the velcro strap and put aside the two bars.

2.




Unfold the legs of the camping bed and stand them on a solid & level ground.

3.



Expand the legs.

4.

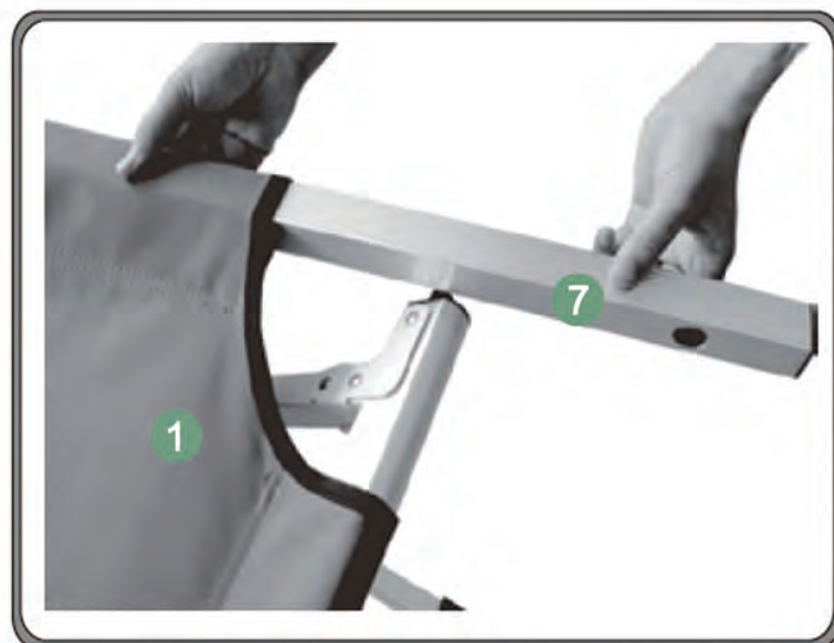


Align a bar and insert it into the bed sleeve.



Pour en savoir plus:
www.quefairedemesdechets.fr

Stand:09.2021

5.

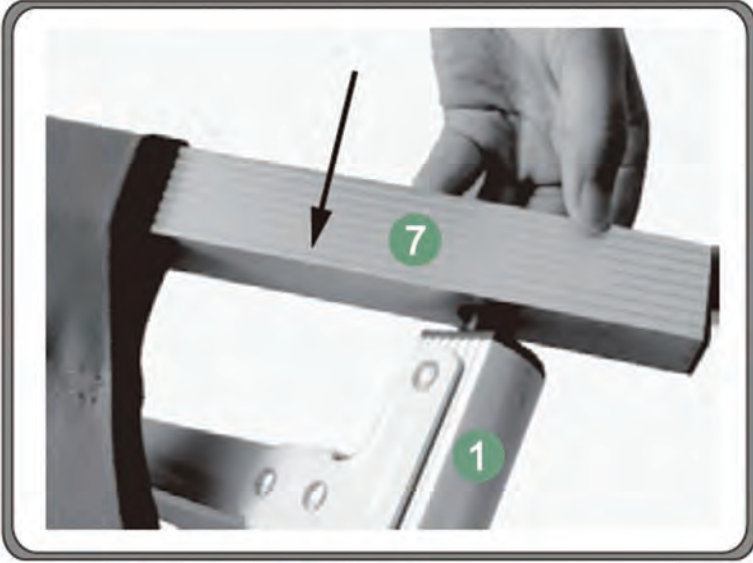

Fasten the bar.

6.



Unfasten the hook&loop of opposite side and fasten the bar.

7.



Tightening the fabric and fasten the hook&loop.

8.



Then the camping bed is finished.

9.



Open the FRP poles.

10.



Insert long FRP poles to the tent.

11.



The end of long FRP poles is inserted to the hole.

12.




Insert short FRP poles to the tent.

13.



Clip the plastic onto the pole.

14.

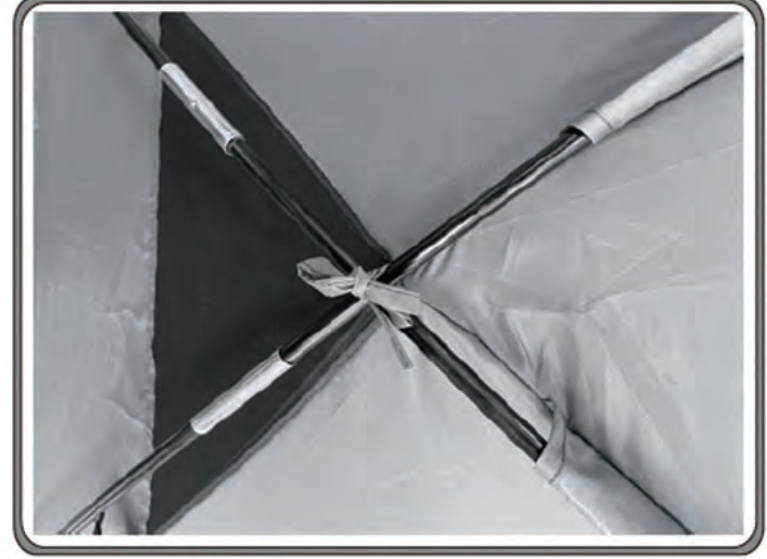

Tie the rope.

15.



Put the tent on the bed and tie the rope in the corner around the bar.

16.



Close the buckle under the bed.

17.



You can hang a lamp in the tent.

18.



Unscrew the gas nozzle counterclockwise , the inflation will be completed automatically within 5-8 minutes, and then tighten the gas nozzle clockwise.

19.



Put inflated air bed on the camping bed.

20.



Use the rope and fastening nail to stabilize the tent.

21.



When you only use the tent, pls insert the pole into the soil and fasten with nail . If you need sunshade , pls use nail and rope to fasten it.

When you need to fold the air bed for storage,pls do as following steps.

22.



Unscrew the gas nozzle counterclockwise.

23.



Flat air bed.

24.



Press and roll it up to deflate.

25.



Put it in a storage bag.